

Z-3220 Handheld Linear Image Scanner

32 Bit
Ultrascan Decoding Technology

Standard Device

	PIN-OUT CONFIGURATION			
	MODULE JACK_PIN#	Keyboard Wedge	RS-232C	USB
	#1	N/C	RTS (TTL level)	N/C
	#2	Keyboard_ Data	N/C	USB_D+
	#3	PC_Clock	N/C	USB_D-
	#4	Ground	Ground	Ground
	#5	N/C	CTS (TTL level)	N/C
	#6	N/C	RXD (TTL level)	N/C
	#7	Keyboard_Clock	N/C	N/C
	#8	PC 5V	N/C	USB 5V
	#9	PC_Data	N/C	N/C
	#10	N/C	TXD(TTL level)	N/C

Ordering Information

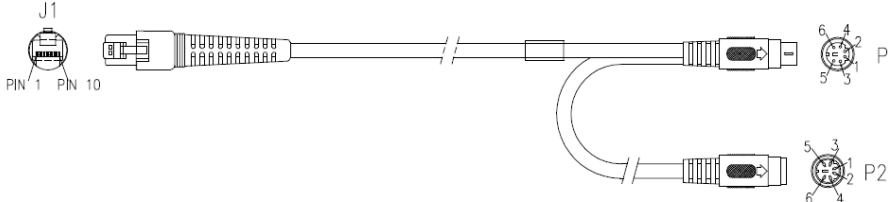
	88H-200000-000	Z-3220	White housing (device only, w/o cable)
	88H-200000-001	Z-3220 (B)	Black housing (device only, w/o cable)
	88H-2000KP-000	Z-3220 (K)	White housing w/PS/2 cable
	88H-2000KP-001	Z-3220 (K)(B)	Black housing w/PS/2 cable
	88H-2000RP-000	Z-3220 (R)	White housing w/RS-232 cable (DTE pin-out)
	88H-2000RP-001	Z-3220 (R)(B)	Black housing w/RS-232 cable (DTE pin-out)
	88H-2000UB-000	Z-3220 (U)	White housing w/USB cable
	88H-2000UB-001	Z-3220 (U)(B)	Black housing w/USB cable
	88H-2000RP-0NB	Z-3220 (R)	White housing w/RS-232 cable (DTE pin-out) w/o ZEBEX logo
	88H-2000RP-0N1	Z-3220 (R)(B)	Black housing w/RS-232 cable (DTE pin-out) w/o ZEBEX logo
	88H-2000UB-0NB	Z-3220 (U)	White housing w/USB cable w/o ZEBEX logo
	88H-2000UB-0N1	Z-3220 (U)(B)	Black housing w/USB cable w/o ZEBEX logo
	88H-2000UR-000	Z-3220 (UR)	White housing w/USB Virtual COM Interface
	88H-2000UR-001	Z-3220 (UR)(B)	Black housing w/USB Virtual COM Interface

[Buyer's Guide]

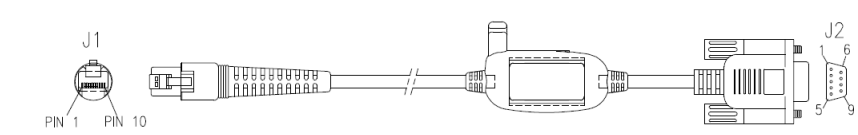
Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include PS/2, RS-232, and USB cable.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

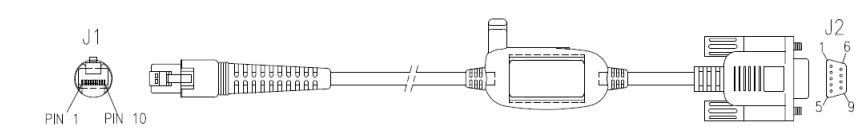
1. Keyboard Wedge Cable (for PS/2)

		PIN-OUT CONFIGURATION	
		MINI DIN (M)	MINI DIN(F)
		1. PC Data	1. KB Data
		2. N.C.	2. N.C.
		3. GND	3. GND
		4. +5V	4. +5V
		5. PC Clock	5. KB Clock
		6. N.C.	6. N.C.
Item Part No. 171-10K102-200			

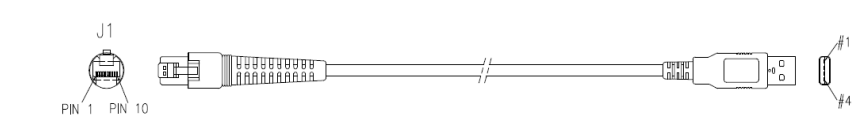
2. RS-232C Communication Cable (DTE pin out)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
		2	TX
		3	RX
		7	CTS
		8	RTS
		5	GND
		9	+5V Input
Item Part No. 171-10R442-200			

3. RS-232C Communication Cable (DCE pin out) (non-standard option)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
		2	RX
		3	TX
		7	RTS
		8	CTS
		5	GND
		9	+5V Input
Item Part No. 171-10R432-200			






4. HID USB / Virtual COM USB / OPOS USB Interface with Detachable Cable Type A

		PIN-OUT CONFIGURATION	
		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	VSS
Item Part No. 171-10U303-200			
171-10U302-200			

* Additional software or special firmware may be required for activating virtual COM or OPOS USB interface.

Power Adapter

Z-3220 requires a minimum of 110mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.